


REV.	BY	DATE	DESCRIPTION	APP'D.
A	ZN	06/09/10	MOVED ITEM 18	EMK

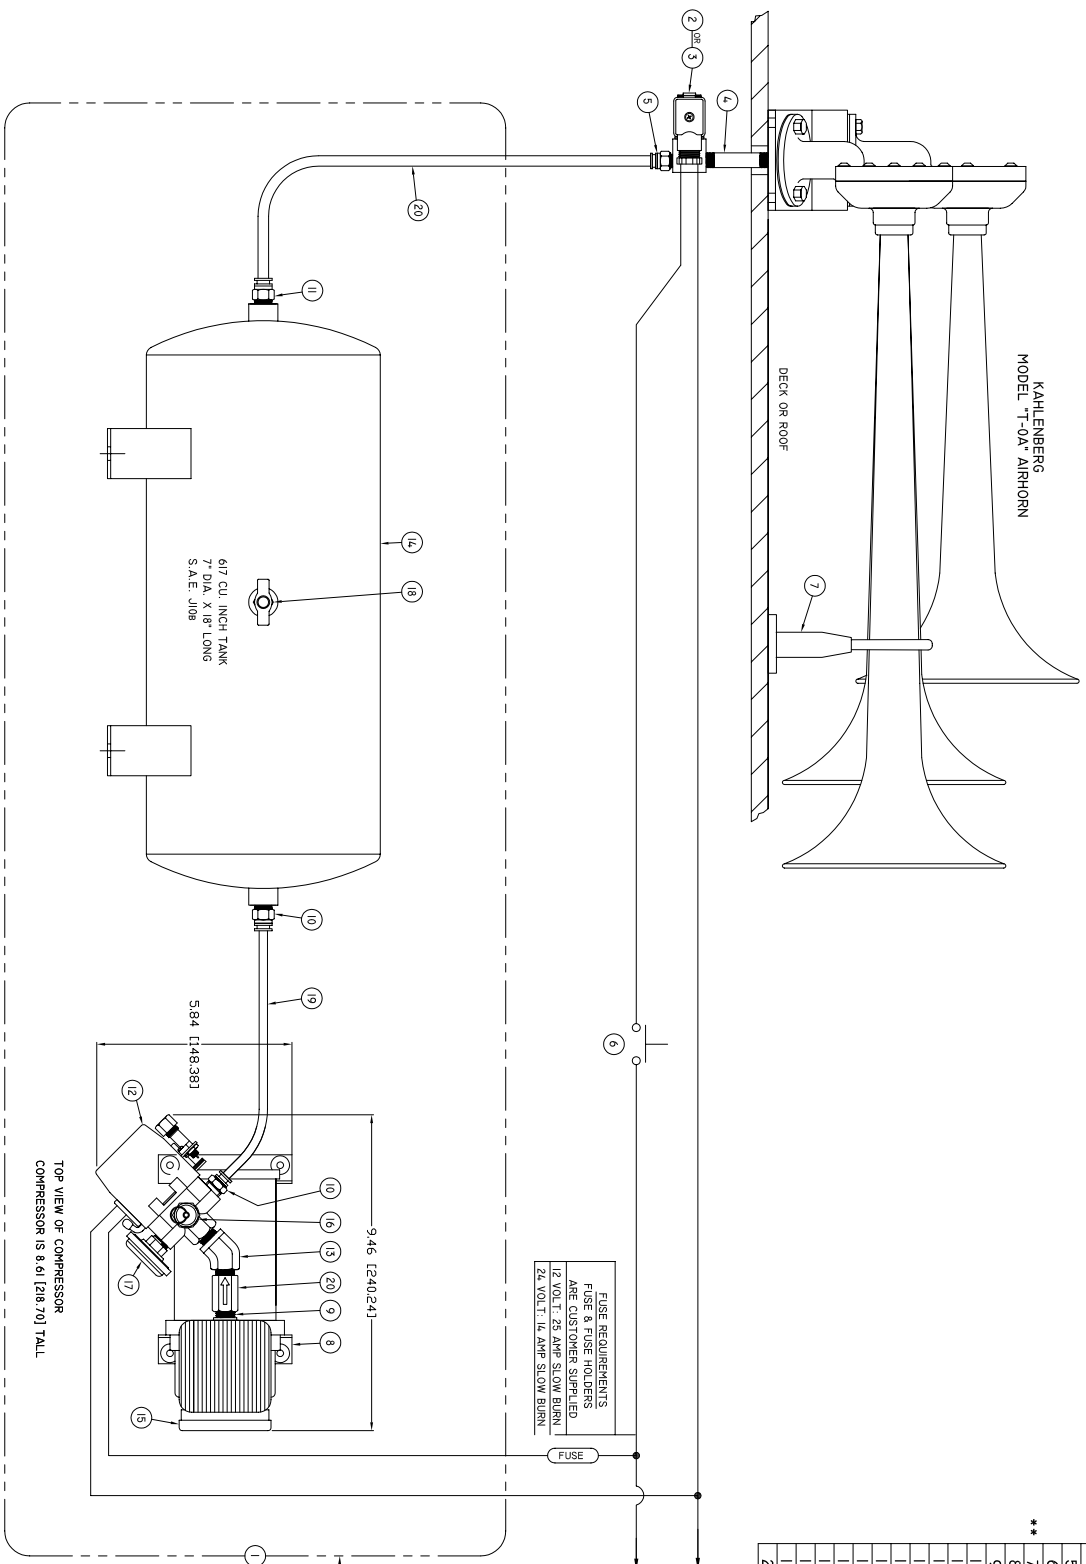


NO.	PART NO.	DESCRIPTION	DRWG.
1	P44.9-23	COMPRESSOR KIT 12V DC	
2	P44.9-24	COMPRESSOR KIT 24V DC	2-502.5
3	V-69K	SOLENOID VALVE, 12 OR 24V DC, 1/8" NPT	2-14.56
4	PI29-08	MANUAL VALVE, 1/8" NPT	
5	PI29-03	PIRE NIPPLE, 1/8" NPT	
6	M-126	CONNECTOR, MALE 1/8" NPT X 5/16" TB	2-502.7
7	M-126	PUSH BUTTON SW. MOMENTARY, S.P.S.T.	2-502.6
**	PT10-01	PROJECTOR SUPPORT ASSEMBLY	
8	PI49-15.16	COMPRESSOR UNIT ONLY, 15A120DC, 16-24V	
9	PI29-19	NIPPLE, CLOSE, 1/4" NPT	
10	PI16-04	CONNECTOR, MALE 1/4" NPT X 1/4" TUBE	
11	PT16-05	CONNECTOR, MALE 1/4" NPT X 5/16" TUBE	
12	PT14.8-005	PRESSURE SWITCH, 120/150 P.S.I.	3-655.4
13	PS12-06	ELBOW, 45 DEGREE, 1/4" NPT	
14	PS21-04	AIR RECEIVER	
15	92623	FILTER	
16	V-808	VALVE, SAFETY, 1/5 PSI	
17	M-14.3	GAUGE, PRESSURE	
18	D176-02	DRAINCOCK	
19	PT130-005	TUBE, 1/4" O.D. X 8" S.A.E. 1844	
19	PT130-004	TUBE, 3/16" O.D. X 18" (LONGER LENGTHS AVAILABLE) S.A.E. 1844	
20	PT130-004	CHECK VALVE	

FUSE REQUIREMENTS
 FUSE & FUSE HOLDERS
 ARE CUSTOMER SUPPLIED
 12 VOLT: 25 AMP SLOW BURN
 24 VOLT: 14 AMP SLOW BURN

CURRENT REQUIREMENTS
12 VOLT 21 AMP
24 VOLT 12 AMP
C.F.M. OUTPUT @ 100 P.S.I.
12 VOLT 0.85 C.F.M.
24 VOLT 0.99 C.F.M.

ALL ITEMS WITHIN DASHED LINE ARE INCLUDED IN COMPRESSOR KIT. KIT ALSO INCLUDES ITEMS #4, & #5.
 MOUNT COMPRESSOR ON RIGID SUPPORT IN PROTECTED AREA WITH AIR FLOW AROUND THE COMPRESSOR.
 USE PRE SEALANT ON ALL THREADED PIPE JOINTS.
 PRESSURE SWITCH MAINTAINS PRESSURE BETWEEN 120 & 150 P.S.I.
 REFER TO INSTRUCTION SHEETS FOR ALL INSTALLATION REQUIREMENTS.



KAHLEBERG INDUSTRIES
TWO RIVERS, WI, U.S.A.

INSTALLATION (SUGGESTED) & PARTS LIST FOR "T-0A" AIRHORN SYSTEM

DR.	DATE	CKD.	SCALE	DRWG. NO.	REV.
ZUN	04/07/10	EMK	N.T.S.	3-6579	A